



RoHS COMPLIANT

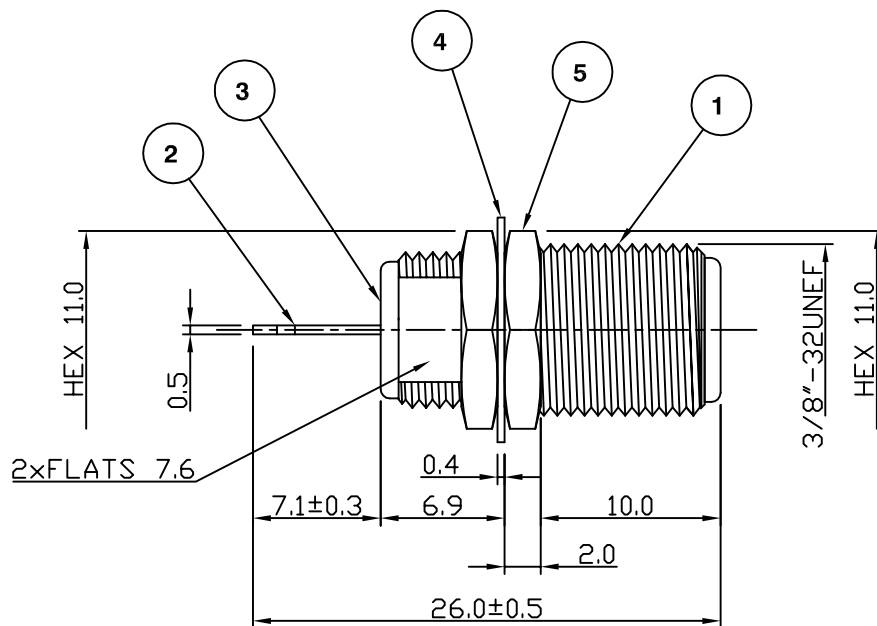

Panel Cutout

Electrical Characteristics

Nominal Impedance: 75 ohms
 Frequency Range: DC to 2 GHz
 Operating Voltage (rms): 250 V maximum at sea level

Mechanical Characteristics

Mating Cycles: 200 cycles minimum

Environmental Characteristics

Temperature Range: -55 °C to +85 °C

	PART	DESCRIPTION
1	Body	Brass, nickel plated
2	Contact	Brass, nickel plated
3	Dielectric	Polypropylene
4	Washer	Brass, nickel plated
5	Nut	Brass, nickel plated

CAD Issue	SN	3	20 May 03
Up Issue	RS	2	31 Jul 00
First Issue	DH	1	12 Jun 97
DESCRIPTION OF REVISION	APPVD	ISS	DATE



Cinch Connectivity Solutions
 7-13 Russel Way,
 Widford Industrial Estate,
 Chelmsford, Essex,
 CM1 3AA, UK.
 Tel: +44 (0) 1245 359515
 Fax: +44 (0) 1245 358938

SCALE: Not To Scale

DIMENSIONS: mm

TOLERANCES:
 ± 0.2mm unless
 otherwise stated

DRAWN BY:

S Nash

CHECKED BY:

P Couzens

APPROVED BY:

P Couzens

DATE:

20 May 03

TITLE:

F Panel Mount Jack

PART NUMBER:

VF310

PAGE: 1 of 1